STANK .	(1999) S	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1

BROOKHAVEN NATIONAL LABORATORY ASSOCIATED UNIVERSITIES, INC.

Upton, New York 11973

(516) 345- 7631

Safety & Environmental Protection Division

Research Progress Report 2

May 2, 1979

After compiling procedures for the radiochemical separation of Sr, Pu, Th, and U from whole teeth samples and holding a meeting with the analytical chemistry group with respect to doing the separation on site, it was decided that for the time being, while BNL is developing the expertise, that the sample will be sent to Dr. James McEnroy's lab at LASL for radiochemical separation and alpha counting. If the levels are not high enough for alpha counting, the nickel discs containing electroplated Pu or U will be fission track counted and the disc $_{\rm W}/$ ${\rm Th}$ will A be alpha track counted.


Another batch of two Marshall Islands teeth samples, two control teeth, and blanks are being embedded and sectioned. The modified procedure should hopefully give fission track autoradiographs that would show the Pu distribution in teeth. Some teeth sections will be sent to Dr. Schlenker of ANL for fission track autoradiography. The results will serve for cross comparison.

Detailed description of the experimental results will be reported in the next progress report.

Horence) lua

Distribution: Dr. Baum

T. Greenhouse Dr. Knudsen Dr. Landolt /Dr. Naidu Dr. Pratt Dr. Vetter Dr. Ziemer



Research Progress Report 1

The objective of my research is to determine the plutonium distribution in human teeth samples and compare it with that found in animal samples. Figure 1 and Table 1 are pictures and captions on alpha and beta autoradiographs of teeth samples from beagles injected with different radionuclides. Only if the distribution in human teeth samples correspond to that in animal samples can one use teeth to bone ratios from animal experiments to obtain bone burden from human teeth activity concentration for human beings.

The experimental procedure involves fission track autoradiography on thin sections of embedded teeth. Fission track autoradiography has to be used instead of alpha autoradiography because the level of activity concencentration in the teeth are of such low quantities, around 200 fGi/gm, that it will take several months to obtain an alpha autoradiograph. In view of the fact that Marshall Islands soil samples have shown trace quantities of uranium and thorium, it was deem necessary that Pu/U ratios be obtained to allay doubt on the origin of the fission tracks in the autoradiographs. Attempts will be made to obtain Pu/Th and Pu/Sr as well as Pu/gamma emitting radionuclides on each entire tooth.


Briefly, I have done a trial run for fission track autoradiography. Details of the procedure on the two teeth samples used are described in Table 2. Table 3 lists the modifications to be tried on the next batch of samples. Figure 2 shows the flow chart for obtaining the different ratios on the whole teeth samples that will be subjected to the radiochemistry procedures. At the moment, I have done qualitative identification of gamma emitting radionuclides and have found for <u>possible</u> radionuclides the daughter products of Th-232 and U-238.

That is all for now.


Aluma J Cura

Florence T. Cua

cc. Dr. Landolt) Dr. Ziemer)	co-chairmen, Purdue
Dr. Vetter	Purdue
Dr. Saum	BNL adviser
🗸 Dr. Naidu	Dose Reassessment project, Marshall Islands Radiological program
T. Greenhouse	Program Director, Marshall Islands Radiological Program
Dr. Pratt	Marshall Islands Medical Team Director

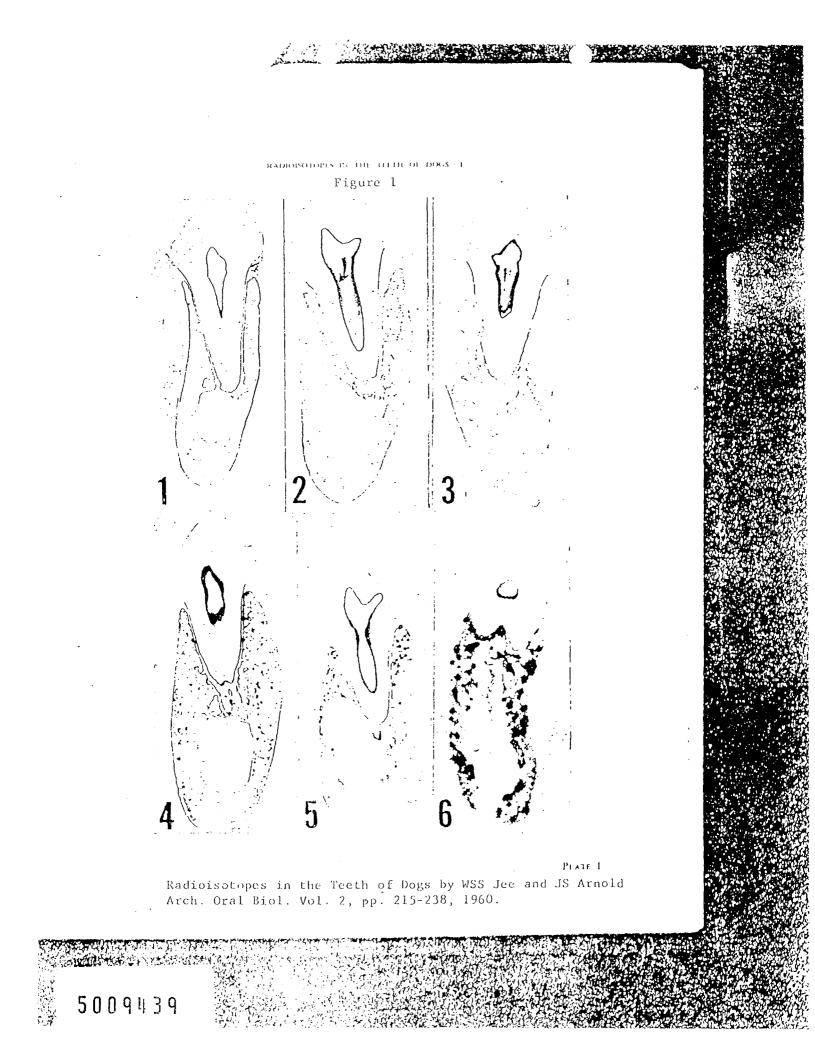



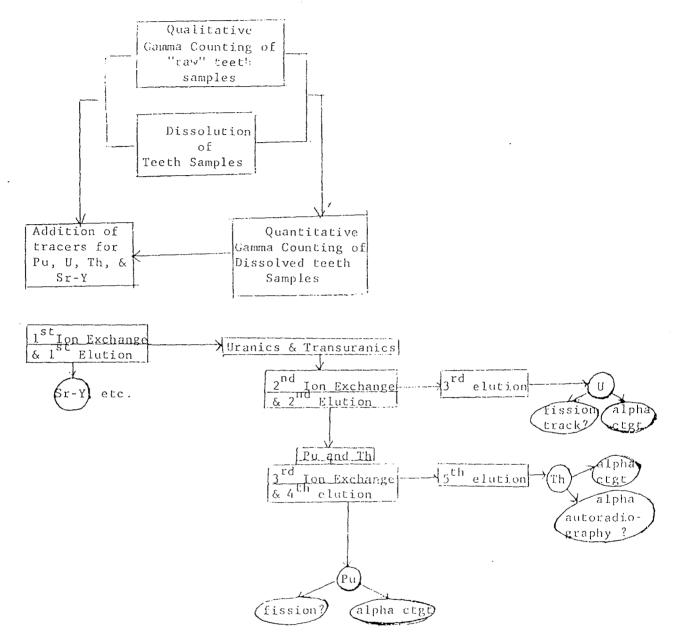

Results: Pu/gammas, Pu/Sr-Y, Pu/U, Pu/Th

if fission and alpha autoradiography have to be done, the kind of tracers which is used for obtaining recovery yields has to be well-chosen to insure non-addition of extraneous fission tracks or alpha tracks.



2,32

W. S. S. JEE AND J. S. ARNOLD

ためのないです。

5

Table 1

JO 9 4 4 1

PLATE 1

FIG. 1. Deposition pattern of plutonium in tooth and mandible 1 day after injection, $\times 3.6,$

Fig. 2. Deposition pattern of plutonium in tooth and mandible 777 days after injection. Note non-uniform deposits of activity in post-injection dentine (arrow). ×3.6.

Fig. 3. Deposition pattern of plutonium in tooth and mandible 1576 days after injection. Note altered pattern, $\times 3.6$.

Fig. 4. Deposition pattern of radium in tooth and mandible 12 days after injection, \times 3.6.

Fig. 5. Deposition pattern of mesothorium in tooth and mandible 780 days after injection. $\times 3.6.$

Fig. 6. Deposition pattern of strontium-90 in tooth and mandible 960 days after injection. \times 3-6,

Participation and the second states are second states and the second states are second states

Table 2

Fission Track Autoradiography Procedure used on two teeth samples from the Marshall Islands

Description of teeth: no ID Tooth A was an intact incisor Tooth B was a molar with very little of the roots attached

Step	Description	Comments
Dehydration	2 to 3 changes in absolute ethanol	To minimize outgassing when teeth are being irradiated and to permit the polymer to infiltrate the teeth
Infiltration	placed in unpolymerize methyl methacrylate + l% (by weight) of catalyst, benzoyl peroxide for 2 days	full infiltration of teeth is more difficult than of bone
Embedding	replacement of above by methyl methacrylate + accelerator (25:1 by volume)	The accelerator causes the polymeri -zation of the methyl methacrylate through an exothermic reaction
Curing .	allowed the sample to solidi fy in a vacuum dessicator overnight	- Better curing can be done by using a pressure chamber (e.g. 250 lb/in ² and 50 ⁰ C)
Sectioning	use of carborundum saw to remove parts of glass mold	The cured material stuck to the glass mold. Such should not have occured if a mold releaser is used.
	Ten sections ranging from 356 µm to 1816 µm in thick- ness were obtained from the two teeth samples with a macrotome 2 precision saw(100 mm diameter diamond blade, water cooled)	Thinnest section obtained of encapsulated teeth had been 250 jum, according to the instruction manual
Preparation for irradiation	Each section was sandwiched between lexan foils(250 um thrie ¹ , 2.85 cm diameter) & 5 pairs from each teeth stacked one after the other and wrapped in pure Al foil	Wrapping in Al foil is supposed good to provide contact between teeth and Lexan
Irradiation	10 ¹³ nt/cm ² sec neutron flux for 2 hrs at the Medical Research Reactor which has a thermal to fast neutron ratio of about 33. Ambient temperature in the capsule is greater than 50 ⁰ C. The	A low n_f/n_f ratio is desired to prevent U-238 fast fission and $2^7 Al(n_f, \lambda)^{24} Na$ reaction Control teeth were inaccessible at the time. Control lexan was not included in the irra- diated batch this time(plain



cont.

`

.

	Step	Description	Comments
		neutrons were supposed to come from all direc- tions	forgetfulness)
-	Etching	20 minutes etching at 5.94N KOH \pm 0.495 at 60.5°C, 40 minutes etching at 5.72N KOH \pm 0.305 at 60.3°C, 80 minutes etching at 5.14N \pm 0.428 at 60.3°C	The foils were totally immersed in 3.5 l KOH after CM reading on the foils were less than l mR/hr
	Rinse	15-20 minutes in circu- lating distilled water	
	Drying	86 ⁰ C oven till dry	
	Tracks viewing	 a) tracks from 20 min. etching are needle like, for 40 and 80 min. are small and big oval-shaped holes respectively b) tracks that have to b U or Pu fission tracks abound on foils in direct contact with the Al foil and on the edges of the foil. c) Images of the tooth and the embedding materia is present d) Star aggregates are present though sparse and can be found mainly where the tooth is but is also visible where the tooth isn't e) Needle like tracks from 40 min and 80 min etchings seem to be bu- ried is sections where the dentine of the tooth was f) photomicrographs and polaroid shots of tracks on the viewing screen were taken 	 b) though the Al foil has a high chemical purity, U contamination can easily come about through contact with the atmosphere, etc. c) due to inadequate contact, images of the dentine, pulp, enamel are not distinguishable d) aggregates could be clusters of Pu in the teeth or resulting

Table 3

Modification of the Procedure used for Fission Track Autoradiography of Marchall Islands Teeth Samples

.

Step	Modification
Dehydration	none
Infiltration	none
Embedding and Curing	instead of Solution B from Polyscience Inc. as accelerator, use 2,2' Azobisiso butyrontrile ALBN (0.5% by weight). The methyl methacrylate plus ALBN will be exposed to uv light, overnight-1 day. The new procedure should result in a harder polymer To provide easy release of the specimen from the mold, a release agent such as silicon grease (20% by wt.) dissolved in methyl methacrylate can be used to coat the inside of the glass mold.
Sectioning	Sections as thin as 250 λ m will be attempted.
Preparation for Irradiation	a) If Al foil were to be used, several pieces of lexan or polyethylene discs should be placed between the foil and the "teeth sandwich"
	b) A new set-up without the use of Al foil is being planned
Irradiation Instead of the "rabbit" pneumatic tube irra facility, the "aluminum can" radial set-up be used; the former has a n _{th} /n _{fast} ratio and temperature is greater than or equal to whereas the latter has a ratio of 300 and to is greater than or equal to 30°C. Irradiat time has to be increased considerably since former has a neutron flux of 10° nt/cm sec whereas the latter of 3x10° nt/cm sec, sma by a factor of 3. The irradiation time use previously is too short, as observed from the tracks, and may have to be increased 2- %. the new irradiation time may be 8-10 hrs.	
Stching	for long irradiation time, greater than or equal to 10 hrs at the 3x10 ¹² nt/cm sec flux, Billie Oltman of AML aggests lower temperature and lon- ger etching time, 44°C, 90 minutes. If 60°C is to be retained, 35 minutes etching time was recom- mended. He also recommends partial immersion instead of total immersion- etch the side against the teeth specimen only. The set-up used at ANL is 6.25M KOH in a 1500 mL pyrex tray on top of a hot plate with temperature measured by a thermometer. This should improve signal to noise ratio and also



-

.

.

.

Rinse

Drying

Tracks viewing

none

air dry or oven dry

with the use of a micrometer slide, the track length can be measured. Hopefully, the signal to noise ratio would be better and good contact between teeth and lexan obtained so that a good fission track autoradiograph detailing Pu distribution in teeth can be acquired.